


# SF|ZL

## Strain Relief Plates for 35 mm DIN Rail

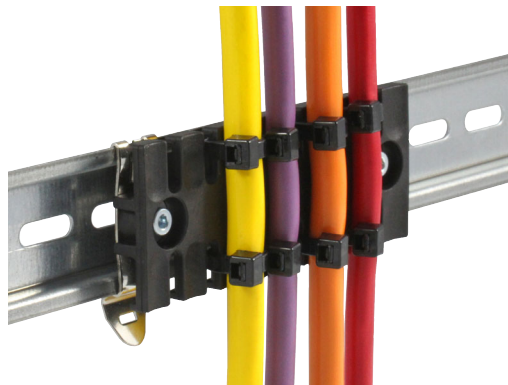

### Product Description

The strain relief plate SF|ZL is used for assembly on 35 mm DIN rails. It can be used for strain relief of cables and conduits.

The SF|ZL range is based upon the strain relief plate ZL, which is mounted on snap feet for 35 mm DIN rails.

### 3 Advantages & Benefits

- Strain relief according to EN 62444
- Easy assembly
- Cost-effective
- High cable density
- Wide variety of mounting options

### Specifications

Material	ZL: Polyamide (PA) SF-foot: Spring steel
Flame class	UL94-Vo
Operating temperature	- 40°C to + 140°C (static) - 40°F to + 284°F (static)
Properties	Halogen-free, silicone-free

### Accessories

ZL|SB-EMC Shield plates 153

Type	Order No.	Length L1	Length L2	No. of teeth	PU
SF ZL 39	32351	38.5 mm 1.516 "	19.5 mm 0.768 "	3	10
SF ZL 60	32352	59.5 mm 2.343 "	43.5 mm 1.713 "	4	10
SF ZL 70	32353	69.1 mm 2.72 "	43.5 mm 1.713 "	5	10
SF ZL 87	32354	86.5 mm 3.406 "	68 mm 2.677 "	6	10
SF ZL 103	32355	102.5 mm 4.035 "	84 mm 3.307 "	7	10
SF ZL 121	32356	121 mm 4.764 "	102.5 mm 4.035 "	8	10
SF ZL 140	32357	139.5 mm 5.492 "	121 mm 4.764 "	9	10
SF ZL 180	32358	180 mm 7.087 "	157 mm 6.181 "	12	10

